

LUXURY VINYL FLOORING

**AUTHENTIC LOOK
UNFORGETTABLE FEEL**

Featuring **RIGICORE** Technology




VOL. 4 - RIGICORE ONLY



CONTESSE



CLICK WOOD / RIGICORE 5.0



 RIGICORE 5.0 / RB22401
 GLUEDOWN 2.0 / DB22401

HARVARD OAK WHITE





 RIGICORE 5.0 / RB26128
 GLUEDOWN 2.0 / DB26128

ASPEN OAK SILVER


CLICK WOOD / RIGICORE 5.0



 RIGICORE 5.0 / RB232452513
 GLUEDOWN 2.0 / DB232452513


SOFT OAK NATURAL



 RIGICORE 5.0 / RB22402
 GLUEDOWN 2.0 / DB22402



HARVARD OAK BEIGE



 RIGICORE 5.0 / RB24615
 GLUEDOWN 2.0 / DB24615

ASPEN OAK LIMED




 RIGICORE 5.0 / RB24611
 GLUEDOWN 2.0 / DB24611

ASPEN OAK BLACK



CLICK WOOD / RIGICORE 5.0




 RIGICORE 5.0 / **RB22401**
 GLUEDOWN 2.0 / **DB22401**


HARVARD OAK WHITE



 RIGICORE 5.0 / **RB22402**
 GLUEDOWN 2.0 / **DB22402**

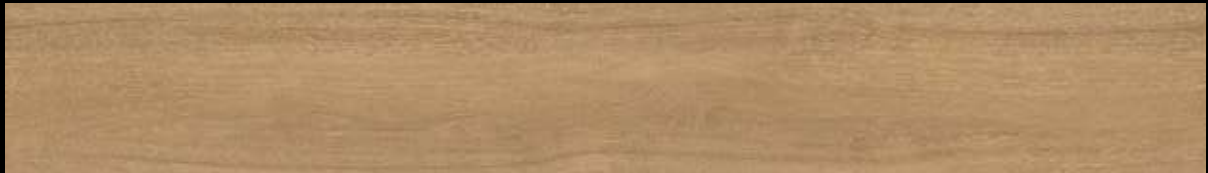

HARVARD OAK BEIGE



 RIGICORE 5.0 / **RB232452513**
 GLUEDOWN 2.0 / **DB232452513**


SOFT OAK NATURAL



 RIGICORE 5.0 / **RB24615**
 GLUEDOWN 2.0 / **DB24615**



ASPEN OAK LIMED



 RIGICORE 5.0 / **RB26128**
 GLUEDOWN 2.0 / **DB26128**

ASPEN OAK SILVER



 RIGICORE 5.0 / **RB24611**
 GLUEDOWN 2.0 / **DB24611**

ASPEN OAK BLACK

CLICK WOOD / RIGICORE 5.0

CONSTRUCTION/ CONSTRUCTION/ CONTRUZIONE/ CONSTRUCTIE

TOTAL THICKNESS/ EPAISSEUR TOTALE/ SPESSORE/TOTALE DIKTE

WEAR LAYER/ COUCHE D'USURE/ STRATO D'USURA/ SLIJTLAG

UTILIZATION CLASS/ CLASSE D'USAGE/ CLASSE D'UTILIZZO/ GEBRUIKERSKLASSE

COATING/ PROTECTION/ RIVESTIMENTO/ BESCHERMING

EMBOSSING/ STRUCTURE/ STRUTTURA/ STRUCTUUR

BEVELLED/ BISEAUTÉ/ BISELLATURA/ V-GROEF

PLANK SIZE/ DIMENSIONS DE LA LAME/ DIMENSIONI/ AFMETING PER PANEEL

CARTON PACKING/ EMBALLAGES EN CARTON/ SCATOLE/ KARTONNEN VERPAKKING

PALLET PACKING/ BO TES PAR PALETTE/ NR SCATOLE A PALETTA/ DOZEN PER PALLET

NET-GROSS WEIGHT PER PALLET/ POIDS NET-BRUT PAR PALETTE/
PESO NETTO-LORDO À PALETTA/ GEWICHT NETTO-BRUTO PER PALLET

CASTOR CHAIR RESISTANCE/ ESSAI DE LA CHAISE À ROULETTES/
PROVA CON POLTRONA A ROTELLE/ ROLWEERSTAND BUREAUSTOEL

EN 425

EFFECT OF FURNITURE LEG/ EFFECT DE PIED DE MEUBLE/
EFFETTO DI GAMBE MOBILI/ EFFECT VAN MEUBILAIR POTEN

EN 424

ELECTROSTATIC PERFORMANCE/ POTENTIEL DE CHARGE ELECTROSTATIQUE/
POTENZIALE DI CARICA ELETTROSTATICA/ ELECTROSTATISCHE EIGENSCHAPPEN

EN 1815

SLIP RESISTANCE/ ANTIDÉPARANT/
RESISTENZA ALLO SCIVOLAMENTO/ SLIPWEERSTAND

DIN 51130

WEAR RESISTANCE/ RÉSISTANCE D'USURE/
RESISTANCE ALL'USURA/ SLIJTVASTHEID

EN 660-2

RESIDUAL INDENTATION/ POINÇONNEMENT RÉMANENT/
SENSIBILITÀ DI IMPRESSIONE/ INDRUKGEVOELIGHEID

EN 433

DIMENSIONAL STABILITY/ STABILITE DIMENSIONNELLE/
STABILITÀ DIMENSIONALE/ DIMENSIONALE STABILITEIT

EN 434

FIRE RATING / CLASSIFICATION AU FEU /
CLASSIFICAZIONE AL FUOCO / BRANDKLASSE

EN ISO 9239-1

FORMALDEHYDE EMISSION / EMISSION DE FORMALDEHYDE /
EMISSIONE DI FORMALDEIDE / FORMALDEHYDE EMISSIE

CLASS EN 717-1

WARRANTY FOR DOMESTIC USE / PÉRIODE DE GARANTIE USAGE DOMESTIQUE /
GARANZIA PER USO DOMESTICO / GARANTIEPERIODE HUISHOUDELIJK GEBRUIK

WARRANTY FOR COMMERCIAL USE / PÉRIODE DE GARANTIE USAGE COMMERCIAL /
GARANZIA PER USO COMMERCIALE / GARANTIEPERIODE COMMERCIEEL GEBRUIK


* VALID FOR LIGHT COMMERCIAL USE AS DESCRIBED BY CLASS 31

** GLUEDOWN 2.0 TECHNICAL SPECIFICATIONS ARE AVAILABLE ON DEMAND

	CLICK WOOD CLASSIC RIGICORE 5.0
	4MM RIGICORE + 1MM IXPE
	5MM
	0,3 MM
	CLASS 31
	PU-GUARD
	NATURAL
	YES
	178X1219 MM
	2,17 M ² / 10 PLANKS
	55 PACKS/PALLET
	1035 KG/1075 KG
	PASS
	PASS
	< 2 KV
	R9/R10 DEPENDING ON EMBOSSING
	GROUP T
	PASS
	PASS
	BFL-S1
	CLASS E1
	15 YEARS
	5 YEARS*



CLICK WOOD / RIGICORE 5.5



 RIGICORE 5.5 / RS80008
GLUEDOWN 2.5 / DB80008



ELEGANT OAK MILD



 RIGICORE 5.5 / RS25118
 GLUEDOWN 2.5 / DB25118

SOFT OAK BREIGE





 RIGICORE 5.5 / RS25105
 GLUEDOWN 2.5 / DB25105

SOFT OAK CHARCOAL



CLICK WOOD / RIGICORE 5.5



 RIGICORE 5.5 / RS25221
 GLUEDOWN 2.5 / DB25221



COOL OAK GOLD



 RIGICORE 5.5 / RS25220
 GLUEDOWN 2.5 / DB25220

COOL OAK SILVER





 RIGICORE 5.5 / RS21513
 GLUEDOWN 2.5 / DB21513

FRENCH OAK



CLICK WOOD / RIGICORE 5.5



 RIGICORE 5.5 / RS23322
 GLUEDOWN 2.5 / DB23322



NATURAL OAK PLAIN



 RIGICORE 5.5 / RS23308
 GLUEDOWN 2.5 / DB23308

NATURAL OAK SMOKED




 RIGICORE 5.5 / RS25310
 GLUEDOWN 2.5 / DB25310

WRECKED OAK BROWN


CLICK WOOD / RIGICORE 5.5




RIGICORE 5.5 / RS25118 SOFT OAK BREIGE
GLUEDOWN 2.5 / DB25118

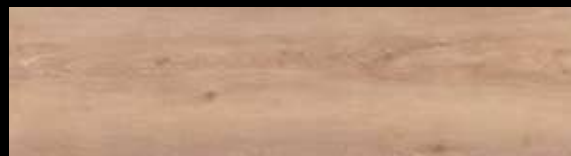

RIGICORE 5.5 / RS25221 COOL OAK GOLD
GLUEDOWN 2.5 / DB25221

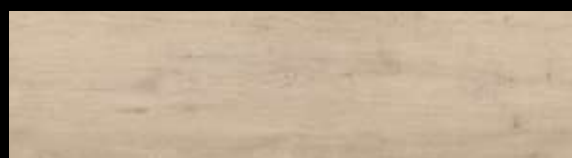


RIGICORE 5.5 / RS80008 ELEGANT OAK MILD
GLUEDOWN 2.5 / DB80008

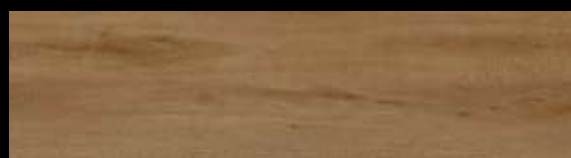

RIGICORE 5.5 / RS23322 NATURAL OAK PLAIN
GLUEDOWN 2.5 / DB23322



RIGICORE 5.5 / RS25220 COOL OAK SILVER
GLUEDOWN 2.5 / DB25220

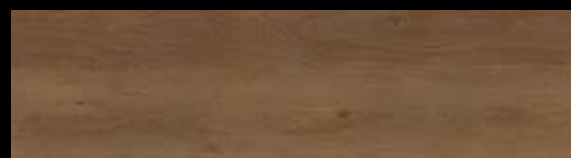

RIGICORE 5.5 / RS23308 NATURAL OAK SMOKED
GLUEDOWN 2.5 / DB23308



RIGICORE 5.5 / RS25105 SOFT OAK CHARCOAL
GLUEDOWN 2.5 / DB25105
















RIGICORE 5.5 / RS21513 FRENCH OAK
GLUEDOWN 2.5 / DB21513



RIGICORE 5.5 / RS25310 WRECKED OAK BROWN
GLUEDOWN 2.5 / DB25310



CLICK WOOD / RIGICORE 5.5

CONSTRUCTION / CONSTRUCTION / CONTRUZIONE / CONSTRUCTIE		CLICK WOOD WIDE RIGICORE 5.5
TOTAL THICKNESS / EPAISSEUR TOTALE / SPESSORE / TOTALE DIKTE		4MM RIGICORE + 1.5 MM IXPE
WEAR LAYER / COUCHE D'USURE / STRATO D'USURA / SLIJTLAAG		 5.5MM
UTILIZATION CLASS / CLASSE D'USAGE / CLASSE D'UTILIZZO / GEBRUIKERSKLASSE		 0,55 MM
COATING / PROTECTION / RIVESTIMENTO / BESCHERMING		 CLASS 33 CLASS 42
EMBOSSING / STRUCTURE / STRUTTURA / STRUCTUUR		PU-GUARD
BEVELLED / BISEAUTÉ / BISELLATURA / V-GROEF		NATURAL
PLANK SIZE / DIMENSIONS DE LA LAME / DIMENSIONI / AFMETING PER PANEEL		YES
CARTON PACKING / EMBALLAGES EN CARTON / SCATOLE / KARTONNEN VERPAKKING		 220X1219 MM
PALLET PACKING / BO TES PAR PALETTE / NR SCATOLE A PALETTA / DOZEN PER PALLET		2,146 M ² / 8 PLANKS
NET-GROSS WEIGHT PER PALLET / POIDS NET-BRUT PAR PALETTE / PESO NETTO-LORDO À PALETTA / GEWICHT NETTO-BRUTO PER PALLET		44 PACKS/PALLET
CASTOR CHAIR RESISTANCE / ESSAI DE LA CHAISE À ROULETTES / PROVA CON POLTRONA A ROTELLE / ROLWEERSTAND BUREAU STOEL	EN 425	 PASS
EFFECT OF FURNITURE LEG / EFFECT DE PIED DE MEUBLE / EFFETTO DI GAMBE MOBILI / EFFECT VAN MEUBILAIR POTEN	EN 424	 PASS
ELECTROSTATIC PERFORMANCE / POTENTIEL DE CHARGE ELECTROSTATIQUE / POTENZIALE DI CARICA ELETTROSTATICA / ELECTROSTATISCHE EIGENSCHAPPEN	EN 1815	 < 2 KV
SLIP RESISTANCE / ANTIDÉPARANT / RESISTENZA ALLO SCIVOLAMENTO / SLIPWEERSTAND	DIN 51130	 R9/R10 DEPENDING ON EMBOSING
WEAR RESISTANCE / RÉSISTANCE D'USURE / RESISTANCE ALL'USURA / SLIJTVASTHEID	EN 660-2	 GROUP T
RESIDUAL INDENTATION / POINÇONNEMENT RÉMANENT / SENSIBILITÀ DI IMPRESSIONE / INDRUKGEVOELIGHEID	EN 433	 PASS
DIMENSIONAL STABILITY / STABILITE DIMENSIONNELLE / STABILITÀ DIMENSIONALE / DIMENSIONALE STABILITEIT	EN 434	 PASS
FIRE RATING / CLASSIFICATION AU FEU / CLASSIFICAZIONE AL FUOCO / BRANDKLASSE	EN ISO 9239-1	 BFL-S1
FORMALDEHYDE EMISSION / EMISSION DE FORMALDEHYDE / EMISSIONE DI FORMALDEIDE / FORMALDEHYDE EMISSIE	CLASS EN 717-1	 CLASS E1
WARRANTY FOR DOMESTIC USE / PÉRIODE DE GARANTIE USAGE DOMESTIQUE / GARANZIA PER USO DOMESTICO / GARANTIEPERIODE HUISHOUDELIJK GEBRUIK		25 YEARS
WARRANTY FOR COMMERCIAL USE / PÉRIODE DE GARANTIE USAGE COMMERCIAL / GARANZIA PER USO COMMERCIALE / GARANTIEPERIODE COMMERCIEEL GEBRUIK		10 YEARS

* GLUEDOWN 2.5 TECHNICAL SPECIFICATIONS ARE AVAILABLE ON DEMAND

CLICK STONE CLASSIC / RIGICORE 5.0



 RIGICORE 5.0 / RS36542
 GLUEDOWN 2.0 / DB36542

WHIPPED CONCRETE GREIGE





 RIGICORE 5.0 / RS36532
 GLUEDOWN 2.0 / DB36532

SANDED CONCRETE DARK



CLICK STONE CLASSIC / RIGICORE 5.0



 RIGICORE 5.5 / **RS36542**
 GLUEDOWN 2.5 / **DB36542**

WHIPPED CONCRETE GREIGE



 RIGICORE 5.5 / **RS36536**
 GLUEDOWN 2.5 / **DB36536**

SANDED CONCRETE DARK

CLICK STONE CLASSIC / RIGICORE 5.0

CONSTRUCTION/ CONSTRUCTION/ CONTRUZIONE/ CONSTRUCTIE

TOTAL THICKNESS/ EPAISSEUR TOTALE/ SPESSORE/TOTALE DIKTE

WEAR LAYER/COUCHE D'USURE/STRATO D'USURA/SLIJTLAAG

UTILIZATION CLASS/CLASSE D'USAGE/ CLASSE D'UTILIZZO/GEbruikersklasse

COATING/PROTECTION/RIVESTIMENTO/BESCHERMING

EMBOSSING/STRUCTURE/STRUTTURA/STRUCTUUR

BEVELLED/ BISEAUTÉ/BISELLATURA/V-GROEF

PLANK SIZE/DIMENSIONS DE LA LAME/ DIMENSIONI/ AFMETING PER PANEEL

CARTON PACKING/EMBALLAGES EN CARTON/SCATOLE/KARTONNEN VERPAKKING

PALLET PACKING/BOTES PAR PALETTE/NR SCATOLE A PALETTA/DOZEN PER PALLET

NET-GROSS WEIGHT PER PALLET/POIDS NET-BRUT PAR PALETTE/
PESO NETTO-LORDO À PALETTA/ GEWICHT NETTO-BRUTO PER PALLET

CASTOR CHAIR RESISTANCE/ESSAI DE LA CHAISE À ROULETTES/
PROVA CON POLTRONA A ROTELLE/ROLWEERSTAND BUREAUSTOEL EN ISO 4918 - EN 425

EFFECT OF FURNITURE LEG/EFFECT DE PIED DE MEUBLE/
EFFETTO DI GAMBE MOBILI/EFFECT VAN MEUBILAIR POTEN EN 424

ELECTROSTATIC PERFORMANCE/POTENTIEL DE CHARGE ELECTROSTATIQUE/
POTENZIALE DI CARICAELETTROSTATICA/ELECTROSTATISCHE EIGENSCHAPPEN EN 1815

SLIP RESISTANCE/ ANTIDÉPARANT/
RESISTENZA ALLO SCIVOLAMENTO/SLIPWEERSTAND DIN 51130

WEAR RESISTANCE/ RÉSISTANCE D'USURE/
RESISTANCE ALL'USURA/SLIJTVASTHEID EN 660-2

RESIDUAL INDENTATION/ POINÇONNEMENT RÈMANENT/
SENSIBILITÀ DI IMPRESSIONE/ INDRUKGEVOELIGHEID EN ISO 24343-1

DIMENSIONAL STABILITY/ STABILITE DIMENSIONNELLE /
STABILITÀ DIMENSIONALE / DIMENSIONALE STABILITEIT EN 434

FIRE RATING / CLASSIFICATION AU FEU /
CLASSIFICAZIONE AL FUOCO / BRANDKLASSE EN ISO 9239-1

FORMALDEHYDE EMISSION / EMISSION DE FORMALDEHYDE /
EMISSIONE DI FORMALDEIDE / FORMALDEHYDE EMISSIE EN 717-1

WARRANTY FOR DOMESTIC USE / PÉRIODE DE GARANTIE USAGE DOMESTIQUE /
GARANZIA PER USO DOMESTICO / GARANTIEPERIODE HUISHOUDELIJK GEBRUIK



WARRANTY FOR COMMERCIAL USE / PÉRIODE DE GARANTIE USAGE COMMERCIAL /
GARANZIA PER USO COMMERCIALE / GARANTIEPERIODE COMMERCIEEL GEBRUIK

* VALID FOR LIGHT COMMERCIAL USE AS DESCRIBED BY CLASS 31

	CLICK STONE CLASSIC RIGICORE 5.0
	4 MM RIGICORE + 1 MM IXPE
	5.00 MM
	0.30 MM
	CLASS 31
	PU-GUARD
	CONCRETE
	YES
	305 x 610 MM
	1,86 M ² 10 TILES
	60 CARTONS / PALLET
	965 KG / 975 KG
	PASS
	PASS
	< 2 KV
	R9/R10 DEPENDING ON EMBOSSING
	GROUP T
	PASS
	PASS
	BFL-S1
	CLASS E1
	15 YEARS
	5 YEARS*



CLICK STONE XL / RIGICORE 5.5



 RIGICORE 5.5 / RS86548
 GLUEDOWN 2.5 / DB86548



METAL PLATE RUSTY



 RIGICORE 5.5 / RS11843
 GLUEDOWN 2.5 / DB11843

PACIFIC LIMESTONE MEDIUM





 RIGICORE 5.5 / RS11824
 GLUEDOWN 2.5 / DB11824

POLISHED LIMESTONE LIGHT



CLICK STONE XL / RIGICORE 5.5



 RIGICORE 5.5 / RS33442
 GLUEDOWN 2.5 / DB33442

AQUAREL WHITE TILE





 RIGICORE 5.5 / RS66542
 GLUEDOWN 2.5 / DB66542



CARRIBEAN LIMESTONE GREY

CLICK STONE XL / RIGICORE 5.5




 RIGICORE 5.5 / **RS33442**
 GLUEDOWN 2.5 / **DB33442** **AQUAREL WHITE TILE**



 RIGICORE 5.5 / **RS66542**
 GLUEDOWN 2.5 / **DB66542** **CARRIBEAN LIMESTONE GREY**



 RIGICORE 5.5 / **RS11824**
 GLUEDOWN 2.5 / **DB11824** **POLISHED LIMESTONE LIGHT**



 RIGICORE 5.5 / **RS86548**
 GLUEDOWN 2.5 / **DB86548** **METAL PLATE RUSTY**



 RIGICORE 5.5 / **RS11843**
 GLUEDOWN 2.5 / **DB11843** **PACIFIC LIMESTONE MEDIUM**

